

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ► WHITE PAINTED



GENERAL FEATURES

- 200 Lt. Refrigerated upright
- White external cabinet, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (60mm per side)
- Digital Thermostat
- Opening door alarm
- Removable Gasket
- Reversible door
- Doors lock fitted as standard
- Adjustable shelves: 2 Pcs + 1 Pcs Bottom
- N.2 Adjustable feet + N.2 Rollers at the back
- HIGH S/S Adjustable feet or Lockable castor as optional
- Energy efficiency class: A

TECHNICAL SPECIFICATIONS

Capacity	200 L
Temperature	+0°C ~ +8°C
Consumption	0.843 kWh/24h
Rated Power	110 W
Noise level	40 dB(A)
Net Weight	34 Kg
Gross Weight	38 Kg
External Dimensions (WxDxH mm)	600x637x835
Internal Dimensions (WxDxH mm)	500x410x660
Packaging dimensions (WxDxH mm)	640x675x880
Loading quantities 20'/40'/40'HQ	54/108/162

CERTIFICATION


CE RoHS



QR 200



DETAILS

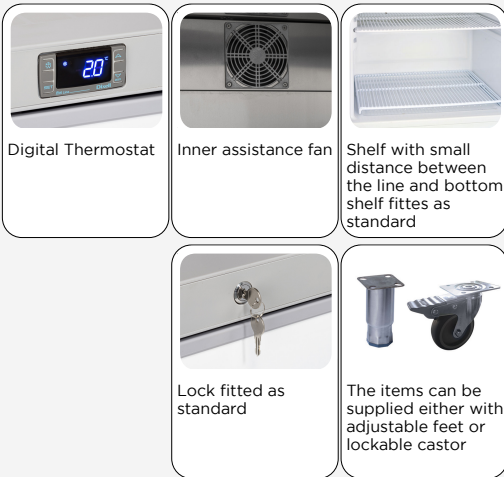

PRODUCT DIMENSIONS

